Evashred
www.evashred.co.uk

Computer Hard Drive & E-Scrap Shredding

EV110E

PERFORMANCE CHARACTERISTICS:

60Kw/59Hp Maximum Power
22-24 Rpm Cutter Speed Rotation
50mm, 75mm or 100mm Cutter Width
1100mm x 600mm Cutting Chamber Opening
Rated to Shred Up To 6000KG Per Hour
72 Dba @ 1 Meter (No Load)
Recommended In-Feed: Hand Feed or In-Feed Conveyor
Recommended Out-Feed: Storage Bin or Conveyor Belt
Electronic Controls
Stationary Applications

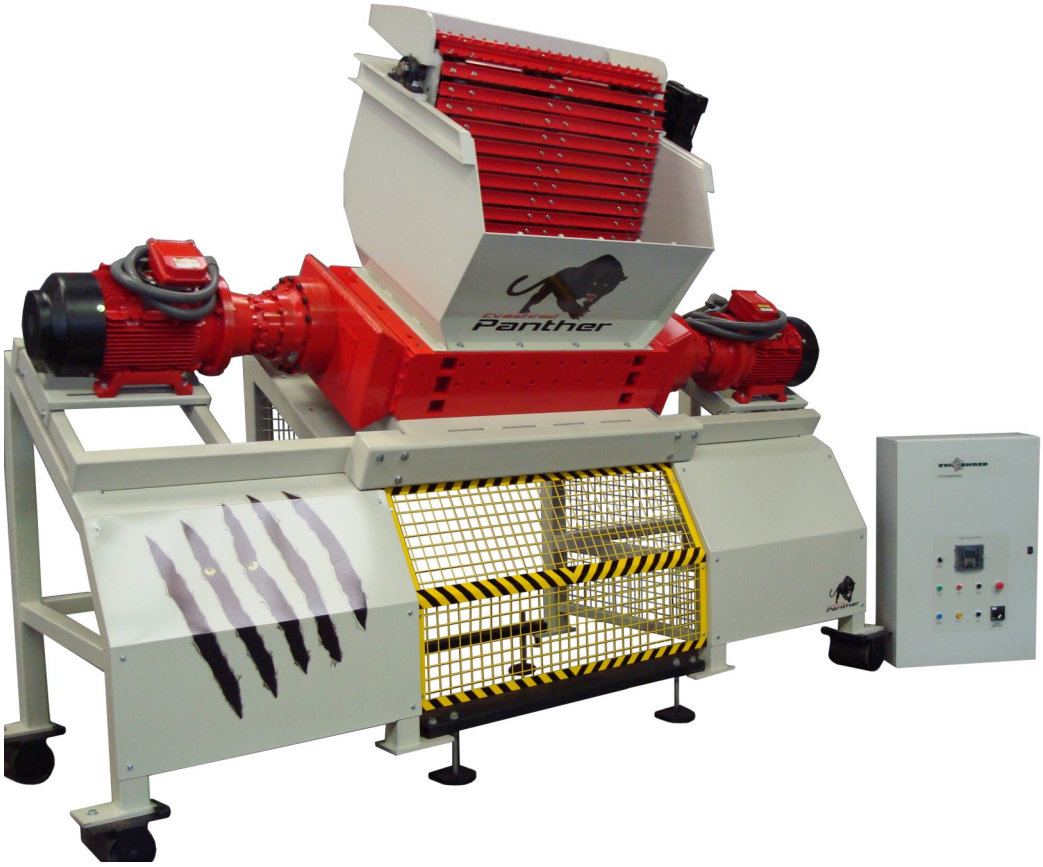

Specifications are subject to change without notice. Contact your nearest distributor/ agent for up-to-date specifications prior to purchase.

EV110E

TECHNICAL SPECIFICATIONS:





PHYSICAL DIMENSIONS:

Total Height	3500mm
Total Length:	4100mm
Total Width:	1400mm
Ground Clearance (Under Rear Of Shredder)	1320mm
Ground to Hopper Lip Height	2060mm
Hopper Opening:	1200mm x 1220mm
Shredder Chamber Opening:	1100mm x 600mm

SHREDDER NAME:	EV110E Shredder
Number of Motors	2x 30Kw (80H/P) 3 Phase 415 Volts
Number of Gearboxes Type of Gearboxes	2 Planetary Reduction
Cutter Width Number of Hooks Per Cutter Cutter Diameter Hex Diameter Critical Shaft Length	50mm, 75mm, 100mm 5 310mm 140AF 1100mm
Cutter Chamber Opening Cutting Chamber Height Hopper Height Total Height Floor Footprint Dimensions Weight Capacity/Throughput Rate	1100mm x 600mm 470mm 1540mm 3500mm 4100mm x 1400mm 3500KG Up To 6000KG Per Hour*

*Throughput figures are greatly influenced by the method of in feed into the Shredder unit.
Variance in cutter widths also have an effect on volume throughput.
Evashred does not guarantee throughput rates at any given location.
Throughput figures are based on factory tests only.

Specifications are subject to change without notice. Contact your nearest distributor/ agent for up-to-date specifications prior to purchase.